



# 高雄贸易有限公司

## KAOH SIUNG TRADING SDN. BHD.



### *High Resolution Inkjet Printer - Thermal Inkjet Printer*

Thermal Inkjet Printer also know as inkjet coding machine that offers plug-and-play installation for industrial inkjet marking and case coding solutions to meet any company's budget. Touchscreen controllers, for multi-line imprints within .50 inch, or up to 3.00 inch with stitched print heads. High Resolution Inks that are suited for both porous and non-porous surfaces, Optional printheads for curved metal cans, plastic, or glass bottles.

SoJet Inline Inkjet Printer is a marking and coding solution that anyone can operate and self-install. All printer functions are accessible via the built-in colour touchscreen controller. Database Integration and connectivity to external devices, via the standard Ethernet, USB and DB15 Connection Ports, makes for simple/intelligent system integration.




The aqueous and solvent based inks cartridges offered for this Thermal Inkjet Printer, performs on both porous and non-porous surfaces, such as paper, cardboard, metal or plastic.

### *SOJET ELFIN IS*

Sojet Elfin IS design with separate controller and printhead suitable for intalation and operation in various environment. Elfin IS design with customizable imprints, this printer can print single or multiple-line prints up to, and within, the maximum print-height of 12.7mm.

Elfin IS with build in language: English and Chinese. Elfin IS is advice to operation in Working Environment : -10 - +45°C; 10% - 85% RH and Storage Environment : -10 - +55°C 10% - 85% RH

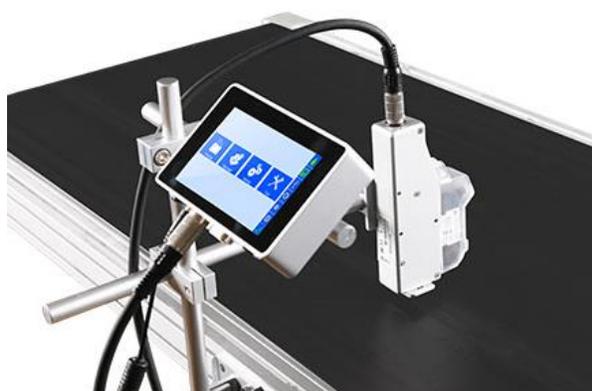

#### TECHNICAL DATA

| Model             |            | Elfin IS (E1S)  |
|-------------------|------------|---|
| Power Supply      |            | AC 100 - 240V / 50-60HZ, 30W<br>(Dedicated AC Adaptor)                    |
| No of Printhead   |            | Single  |
| Printable Height  |            | 12.7mmH<br>(No line limitation within the printing range)                 |
| Resolution        |            | 50 - 600DPI   |
| Printing Speed    |            | 0-60m/min ( 300DPI)   |
|                   |            | 0-30m/min ( 600DPI)   |
| Printing Object   |            | Text, Counter, Date/Time (Autorun),<br>Logo, Shift Code, Barcode, QR Code |
| Database Support  |            | Not Available   |
| Interface         |            | 5 inch 800 x 480 resolution colour<br>LCD Touch Screen                    |
| Port              |            | Ethernet / USD 2.0 / DB15   |
| Machine Dimension | Controller | 151mmL x 93mmW x 32mmH  |
|                   | Printhead  | 175mmL x 100mmW x 33mmH OR<br>144.2mmL x 100mmW x 33mmH                   |

## Sojet Series HP Ink Cartridge

### Solvent Based Inks (Oil Based Ink)

Sojet 5 Series Solvent Based Inks are high-resolution printing for non-porous substrates. Solvent Based Inks are suitable to print on metal, plastic, foil,



#### TECHNICAL DATA

| Ink Color           | Black                    | Yellow  | White  | 52SR  | 53SB  |
|---------------------|---|--|---|--|--|
| Applicable Material | Non-porous substrates such as aluminium foils, PVC, PE, metal, circuit board, plastic, Styrofoam and etc. |  |   |  |  |
| Volume              | 42ml  | 42ml   | 42ml  | 42ml   | 42ml   |
| De-cap time         | 3000 sec  | 60 sec   | 60 sec  | 48 sec   | 48 sec   |
| Dry time            | 3 - 5 s   | 3 - 5 s  | 5 - 10s   | 1 - 2s   | 1 - 2s   |
| Shelf time          | 3months   | 3months  | 3months   | 3months  | 3months  |

Attention: Feature may differ under different circumstances.

### Water Based Inks

Sojet 2 Series Water Based Inks is range of general purpose inks suited for porous substrates. Water Based Inks are suitable to print on cardboard, paper, carton boxes, wood, chipboard. Water based is available for 480ml Bulk Ink.



#### TECHNICAL DATA

| Ink Color           | Black     | Black  | Red  | Blue  | Green  |
|---------------------|---|--|--|---|--|
| Applicable Material | Semi-porous materials like coated paper, paperboard, carton boxes, wood, chipboard and etc. |  |  |   | (Food Grade, FDA certification)  |
| Volume              | 42ml  | 480ml  | 42ml   | 42ml  | 42ml   |
| De-cap time         | 150 sec   | 150 sec  | 60 sec   | 60 sec  | 48 sec   |
| Dry time            | 1 - 3 s   | 1 - 3 s  | 2 s  | 2 s   | 2 s  |
| Shelf time          | 6 months  | 6 months   | 6 months   | 6 months  | 6 months   |

Attention: Feature may differ under different circumstances.

### Optional Accessories / Parts



Synchronizer  
(300DPI)



External Photocell



Fibre Optic  
Sensor



Alarm



Y Cable



Minor Adjustment  
Block



Bulk Ink Bracket



Printer Stand

### Sample Display



Paper Box



Carton Box




Metal



Aluminium



PC Board



PVC Pipe



Bottle



Plastic Container