



高雄贸易有限公司

KAOH SIUNG TRADING SDN. BHD.



Friction Feeder

Friction Feeder is a high speed conveyor complete with automatic feeder. The feeder automatically separated bundle of plastic bags or cards and transferred to the conveyor belt.

Friction Feeder is special design to attach with coding or marking facilitate as inkjet or laser jet printing which reduce workers and improve printing efficiency. Friction Feeder is widely used for product coding and printing purposes.

Ours Carton Feeder always combine with the SOJET Thermal Inkjet Printer with High Resolution and High Speed Printing.


Friction Feeder can easily be integrated to any new or existing processes and common used in the fields of domestic electrical appliance, foodstuffs, general merchandise, medicine and chemical industries. Friction Feeder improve the production speed and efficiency, save time and labour saving.

PCC Series Friction Feeder

PCC Series Friction Feeder is the perfect model friction feeder for the separation of flat products. PCC Series Friction Feeder custom made for 2 in 1 function which able to load carton boxes and inner paper boxes. PCC Friction Feeder design with a multi friction head improve speed and stability of loading. PCC Friction Feeder able to load multi line at same time for inner boxes.

PCC Series Friction Feeder has been developed especially for the medium performance area and use frequency drive motor for production stability and management complete with adjustable feeding speed. Machine design with PLC control extends to the friction rollers to ensure perfect feeding and print position.

Optional: a. Counter b. Feeder Empty Auto Stop c. Vacuum Assist Feeding Aids

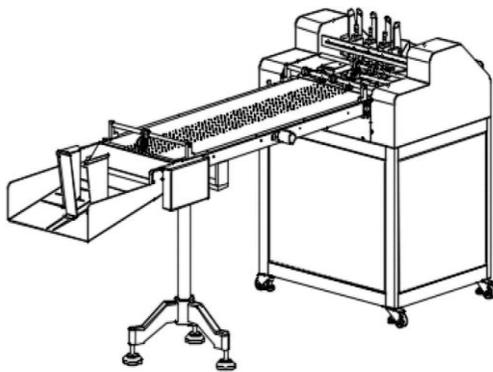

TECHNICAL DATA

| | | |
|---------------------------------|-----------|--|
| ◀ Model | | KST-PCC100 |
| Rated Voltage | | 1 Phase 240V / 200W |
| Product Size | Length | 65mm - 550mm |
| | Width | 80mm - 950mm |
| | Thickness | 1 mm - 18 mm |
| Product Material | | Inner Paper Boxes / Carton Boxes |
| Conveyor Speed | | 0 - 70m / min |
| Number of Fiction Head | | 3 - 5 Head (Depend on Machine Width and Product Dimension) |
| Conveyor Outfeed | Length | 1500mmL |
| | Width | 1000mmW |
| Conveyor (Working Table) Height | | 820mmH |
| Speed Control | | AC Direct Drive Motor |
| Machine Structure | | Stainless Steel |
| Machine Dimension | | 3050mml x 1350mmw x 820mmh |
| Machine Weight | | 250kg |

**Customized specifications are available.